

MVD2510


Amplifiers for Panel Mounting



Special features

- For weighing applications, e.g. for container and silo weighing
- DC amplifier for strain-gauge full bridges from 80...5000 Ω
- Easy operation via rugged, industrial keyboard
- 4 1/2 figure LED display with various special characters
- Auto-tare function
- 2 limit switches
- Analogue output (current/voltage) (± 10 V, ± 20 mA, 4...20 mA)

Block diagram

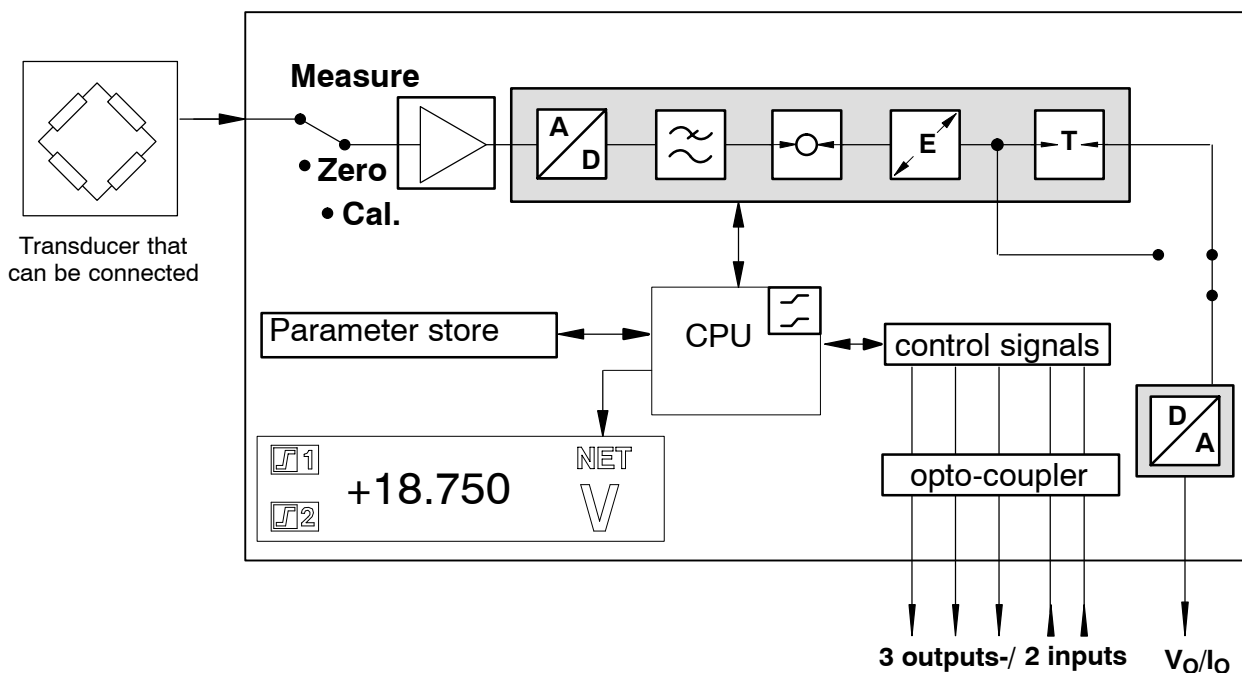


Specifications

Type		MVD2510					
Mains/supply voltage	V	115/230; +6 %; -10 %					
	Hz	48...60					
Power consumption, max.	VA	8					
Fusible-link fuse (slow blow)	mA	200 (115 V) / 100 (230 V)					
DC amplifier							
Bridge excitation voltage ($\pm 5\%$)	V_B	± 2.5 V					
Transducers that can be connected Strain-gauge full bridges	Ω	80...5000					
Permissible cable length between transducer and amplifier	m	500					
Measuring ranges, adjust. (-1 dB)	Hz	0.05...5					
Measuring range	mV/V	0.2...3.8					
Bridge balance range	mV/V	± 3.8					
Measuring frequency range Butterworth low pass (2nd order)		Nom. val.	-1 dB	-3 dB	Phase del	Rise time	Overshoot
		f_c	(Hz)	(Hz)	-		(%)
		(Hz)	4.9	6.9	(ms)	(ms)	5
		5	2.0	3.6	100	54	-
		2	1.0	1.8	140	100	-
		1	0.48	0.86	200	196	-
		0.5	0.21	0.39	290	406	-
		0.2	0.105	0.195	580	900	-
		0.1	0.050	0.099	1070	1800	-
		0.05			2140	3600	-
Noise voltage (typical) without filter	$\mu V/V_{pp}$	<0.4					
with filter	$\mu V/V_{pp}$	<0.2					
Max. permissible comm. mode volt.	V	± 2					
Common-mode rejection	dB	>120					
Max. permissible voltage on input	V	± 5					
Linearity deviation	%	<0.02					
Long-term drift over 48 hours After 15 minutes warm-up	$\mu V/V$	<0.3					
Effect of 10 K ambient temperature change Zero point	$\mu V/V$	< 0.4					
Sensitivity	%	< 0.05					
Analogue output							
Impressed voltage	V	± 10 V					
Permissible load resistance, min.	k Ω	5					
Internal resistance, max.	Ω	1.5					
Impressed current	mA	± 20 ; 4...20					
Permissible load resistance, max.	Ω	500					
Internal resistance, min.	k Ω	100					
Analogue output can represent gross and net values							
Noise voltage	mV _{SS}	10, typ.					
Residual carrier (300 Hz)	mV _{SS}	5					
Long-term drift over 48 hours (After 30 minutes warm-up)	mV	< 3					
Effect of 10 K ambient temperature change (effect additional to digital value) Zero point	mV	< 5					
Sensitivity	%	< 0.1					

Specifications (continued):

Limit switches			
Quantity			2
Comparison level			Gross, net value
Reference voltage (independently adjust.)	V		-10 ...+10
Factory setup, hysteresis	V		0.1
Setting accuracy	mV		0.33
Response time	ms		25
Control outputs (Limits 1 & 2, Warning)			
Nom. voltage, ext. supply voltage	V		24
Permissible supply voltage range	V		6...30
Output current, max.	A		0.5
Short-circuit current, typ.	A		0.8
Short-circuit duration			unlimited
Insulation voltage, typ.	V _{eff}		350
Control inputs			
Input voltage range, LOW	V		0...5
Input voltage range, HIGH	V		10...24
Input current, typ., HIGH level=24 V	mA		12
Taring response time			
	ms		25
Parameter store (EEPROM)			1 set of data
Display			
No. of digits	mV		4 1/2 figure 7-segment display and various special characters
Digit height	mm		14.7
Type			LED display
Keyboard			Membrane keyboard covering 7 key elements on the circuit board
Effect of operating voltage with changes in the stated range, ref. to full scale			
Zero point	%		0.01
Sensitivity	%		0.01
Nominal temperature range	°C [°F]		-20...+60 [-4...140]
Service temperature range	°C [°F]		-20...+60 [-4...140]
Storage temperature range	°C [°F]		-20...+70 [-4...158]
Protection to IEC60 529			IP40 (whole instrument IP51 (front membrane keyboard))
Protection class			I
Dimensions, overall (WxHxD)	mm		153 x 72 x 212
Front panel dimensions	mm		144 x 72
Front panel cut-out (to DIN 43 700)	mm		138 x 68
Weight, approx.	kg		1

Back panel

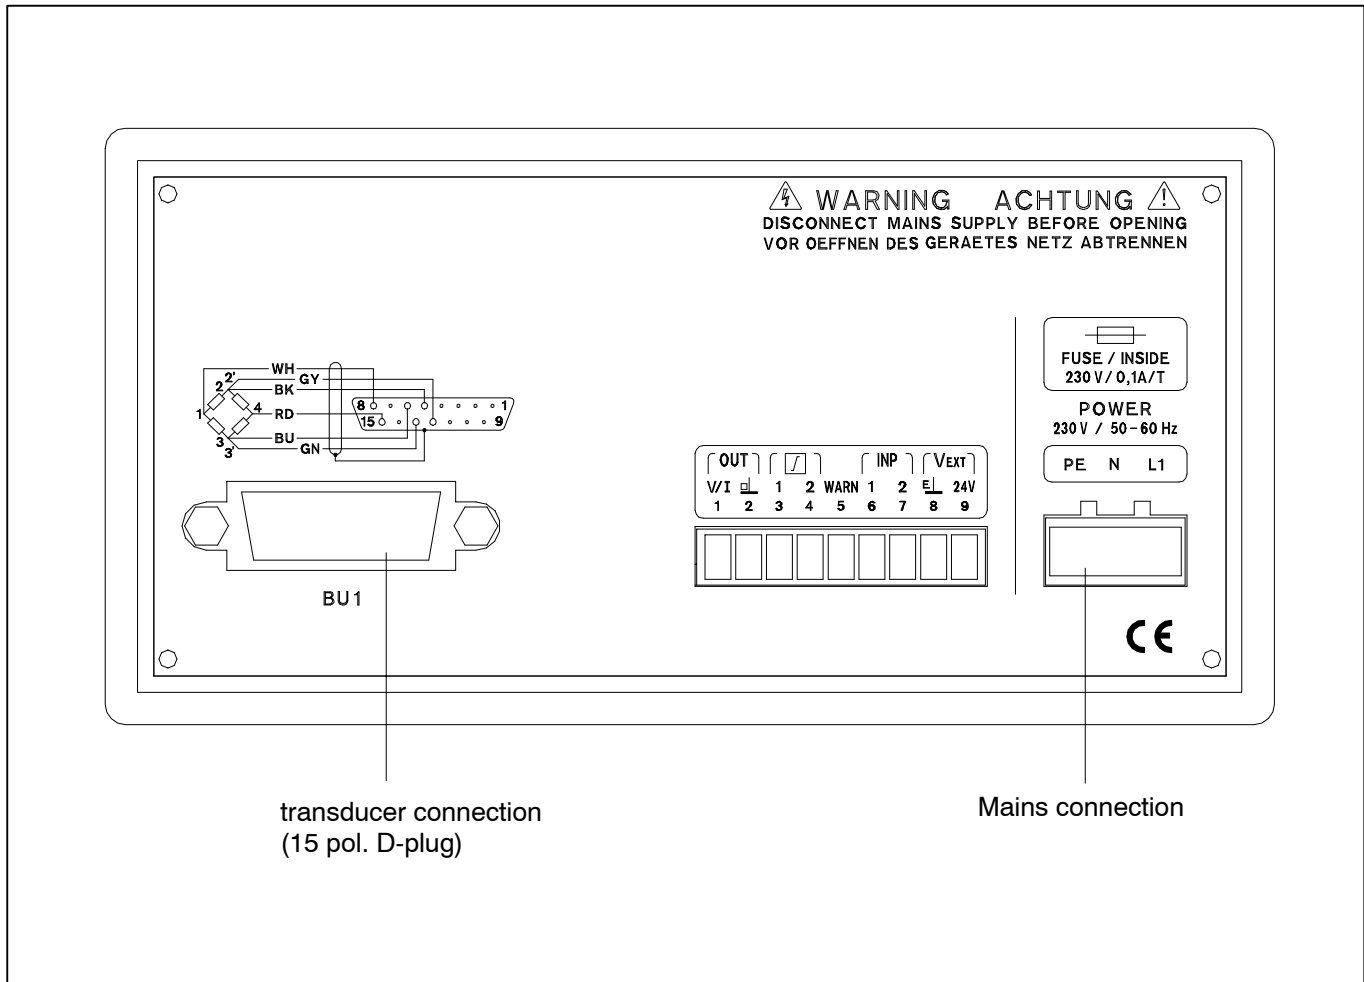

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
 Tel.: +49 6151 8030; Fax: +49 6151 803 9100
 E-mail: support@hbm.com www.hbm.com



measurement with confidence